



# TIMER AND FAVORITE SCENE

The following instructions will help you understand how to set the automatic timer function.

## Daily Timer Function

The following steps allows a user to choose to have up to 2 daily timers scheduled. This feature will automatically turn on the system every day without the need for a calendar function to be created for the entire year. It will also shut the system off daily.

Ensure the system is in the timer mode (Page 3) for the timer to work properly.



### Favorites


This screen highlights all favorites that have been saved for future events. All of these favorites can be edited and/or deleted by sliding the name to the left. Simply touching any of these scenes will automatically put the lights on that scene.

### Combined Effect

This function uses multiple patterns to be on a repeating interval for a unique light show every night.


### Timer Settings

Touch the schedule button to access all of the timer settings in the system.



### Daily Schedule

Use the daily schedule to have the system turn on every day, night, weekday or weekend.



With the daily schedule toggle switch turned to ON choose the pattern from the Library you would like and which days of the week you would like the selected pattern to turn on. Then choose the times you would like them to turn on and off. A second timer is available if you have a second time of the day you would like the lights to turn on.


## Yearly Calendar Function

The following steps allows a user to choose any specific day or range of days and assign a pattern to those dates. This feature will automatically turn on the system on the selected days throughout each month to any desired pattern that has been set for those days. Ensure the system is in TIMER mode for the events to take priority. (Reference Page 3 for the timer to work properly)




### Choose the Month

Tap on the "Create a Calendar Event" and then choose the desired month for the calendar event



### Choose the days

Highlight the days you would like to schedule the calendar event. Then push NEXT

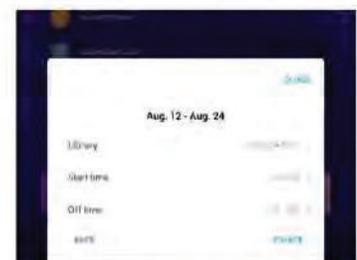

### Choose the Pattern and Times

Choose from a saved pattern in the Library and times for ON and OFF then push CREATE. Repeat these steps for other holidays and events

When using calendar events and daily timers on the same date(s), try to avoid overlapping the start and stop times for those events.

**REMINDER: ALWAYS RETURN TO THE SETTINGS PAGE AND TURN THE SYSTEM TO TIMER MODE TO ACTIVATE THE TIMERS**